

## MAIN SPECIFICATIONS

Model		7FG10 7FD10	7FG15 7FD15	7FG18* 7FD18*	7FG20 7FD20	7FG25 7FD25	7FG30 7FD30	7FG35 7FD35
Engine Model		5K 1DZ-II	5K, 4Y 1DZ-II	4Y 1DZ-II	5K,4Y 1DZ-II, 2Z	5K,4Y 1DZ-II, 2Z	4Y 1DZ-II, 2Z	4Y 2Z
Load Capacity	kg	1000	1500	1750	2000	2500	3000	3500
Load Center	mm	500	500	500	500	500	500	500
Overall Width	A mm	1045	1070	1070	1150	1150	1240	1290
Turning Radius (outside)	B mm	1880	1960	1980	2170	2240	2400	2500
Overhead Guard Height	C mm	2030	2030	2030	2060	2060	2120	2130
Length to Fork Face	D mm	2210	2245	2275	2545	2600	2745	2815

NOTE : \* Powershift transmission models only.



## ENGINE SPECIFICATIONS

Model		Toyota 5K Gasoline	Toyota 4Y Gasoline
Piston Displacement	cc	1486	2237
Rated Horsepower/r.p.m	kw	28/2800	40/43/2400(2600)
Rated Torque/r.p.m	N-m	112/2000	161/1800

NOTE : ( ) for 7FG30/7FGJ35.

Model		Toyota 1DZ-II Diesel	Toyota 2Z Diesel
Piston Displacement	cc	2486	3469
Rated Horsepower/r.p.m	kw	40(44)/2400(2600)	49/2200
Rated Torque/r.p.m	N-m	166/1600	215/1600

NOTE : {} for 60-7FD20,25,30./62-7FD20,25,30.

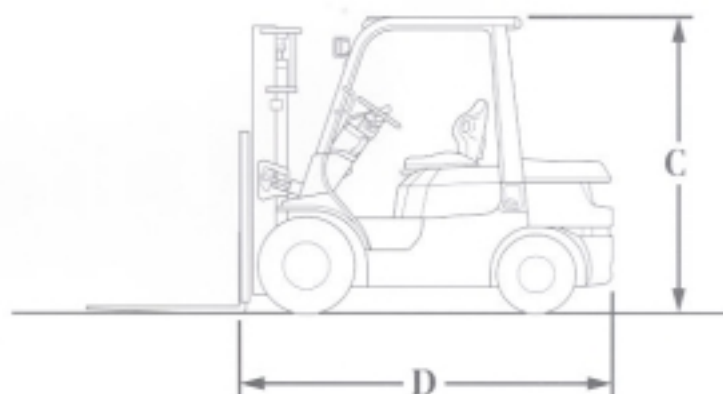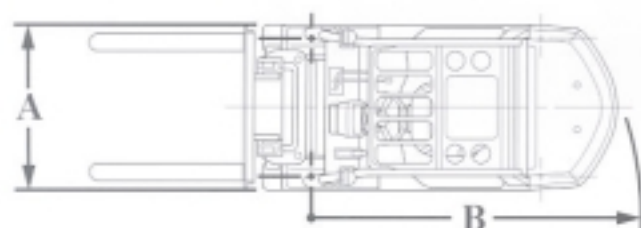

Availability and specifications are determined regionally and are subject to change without notice.  
Please consult your Toyota representative for details.

Printed on recycled paper.